


Assembly Instructions for 19313 Pembroke Trolley

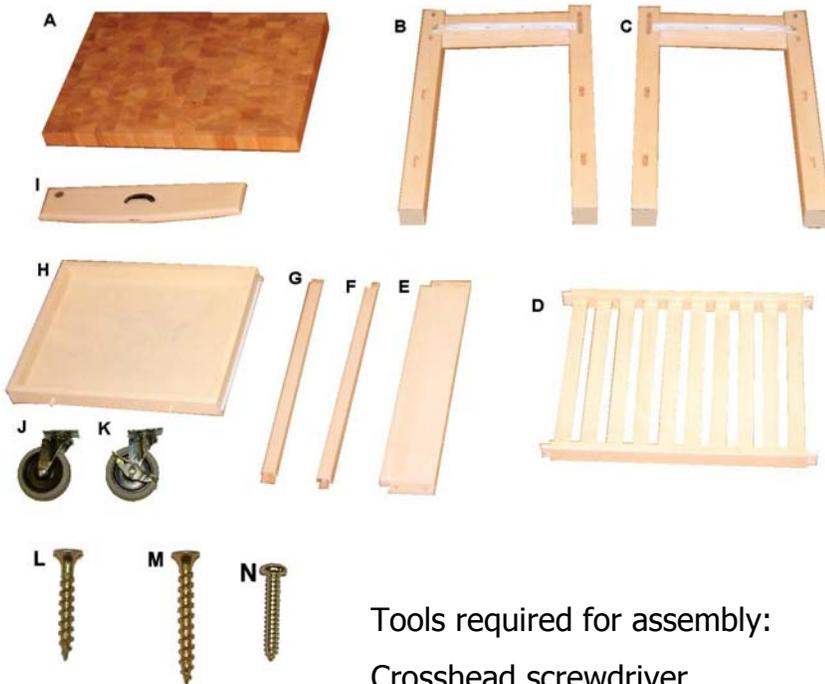

Tools required for assembly:
Crosshead screwdriver

Box contents:

- A: Worktop x 1
- B: Left leg assembly x 1
- C: Right leg assembly x 1
- D: Shelf x 2
- E: Back Panel x 1
- F: Top front rail
- G: Lower front rail
- H: Drawer box
- I: Drawer front
- J: Non-locking castor x 2
- K: Locking castor x 2
- L: Short screw x 3
- M: Long screw x 14
- N: Castor screw x 16

Step 1



Insert shelf (D) into slots in leg assembly (B), ensuring the screw holes are on the underside. Fix shelf using 2 large screws shown by arrows.

Repeat this stage for the remaining shelf (D).

Step 2

Insert Back panel (E) into slot in leg assembly and fix with 2 large screws. Insert lower front rail (G) into slot in leg assembly and fix with 1 large screw. Insert top front rail (F) into slot in leg assembly ensuring the top of the rail is level with the top of the leg.



Step 3




Place the remaining leg assembly (B) on top of the ensuring all components fit into the slots in the leg.

Fix shelves, back panel and lower front rail to this leg assembly using the remaining 7 large screws.

Step 4

Position drawer front (I) onto drawer box (H) using 2 wooden dowels (shown by arrows). Secure the drawer front to the drawer box using 3 x small screws into the rear of the drawer front

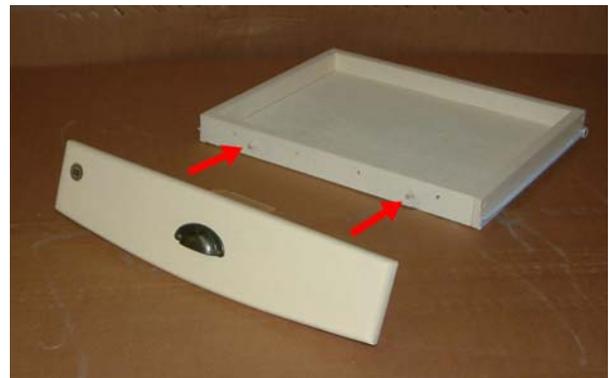

Step 5

Turn trolley assembly upside-down and fix locking castors (K) to the base of the front legs using 4 x castor screws (N) per castor into the pre-drilled holes. Repeat this step for the non-locking castors (J) on the rear legs.

Step 6



Slide the drawer assembly onto the runners in the body of the trolley.

Place the worktop (A) onto the body of the trolley ensuring the slats on the underside of the worktop are inside the body of the trolley.

Your Pembroke trolley is now complete.